



# Mendota FullView FV33i & FV44i Direct Vent Gas Fireplace Insert Specifications

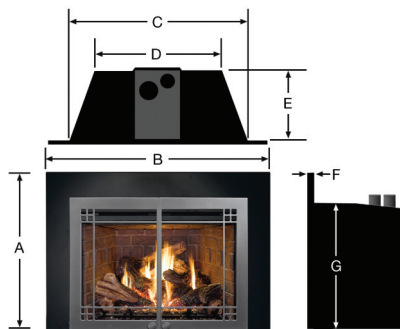

Shown with Homestead doors in Vintage Iron



Shown with Andover doors in Black

	FV33i		
A	24"	27"	31"
B	36"	40"	44"
C	30-5/16"		
D	22-1/4"		
E	15-5/8"		
F	1-3/4"		
G	18-1/4"		

	FV44i		
A	31"	33"	36"
B	44"	48"	52"
C	35"		
D	24"		
E	16-3/8"		
F	1-3/4"		
G	23-3/4"		

## Minimum Fireplace Opening Requirements

### for FV33i & FV44i Inserts:

FV33i: 31-1/16" Wide x 18-3/8" High x 15-3/4" Deep

FV44i: 34-1/2" Wide x 24" High x 17" Deep

### FV33i Andover Arched Faceplate

H-28-7/8" I-40-1/4" J-24-7/8" RADIUS-52-11/32"

### FV33i Bentley Arched Faceplate

H-28-7/8" I-40-1/4" J-22-7/8" RADIUS-36-7/8"

### FV33i Grace Arch Arched Faceplate

H-23-25/32" I-33" J-19-5/32" RADIUS-31-11/16"

### FV44i Andover & Bentley Arched Faceplate

H-33-3/8" I-44" J-27-3/8" RADIUS-43-1/32"

### FV44i Grace Arch Arched Faceplate

H-29-9/32" I-37-3/8" J-24-1/2" RADIUS-38-15/16"

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.



## Specifications

BTUH	FV33i - Hi 31,000 Lo 10,000 FV44i - Hi 40,000 Lo 15,300
Efficiency	Up to 86.3%
Gas Supply	Natural or LP
Vent Size	3" Intake, 4" Exhaust
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	FV33i - 175 lbs. FV44i - 200 lbs.

## Standard Equipment:

One ceramic plaque burner & one tube burner\* (back burner turn-off from remote control), premium fiber log set, grate, embers & coals, AGA certified safety system, IPI electronic ignition, two blowers, remote control with flame & fan modulation & accent lighting control, FireLight accent lighting. \*FV33i has two tube burners.

## Options:

Mendota fronts & doors; Three sizes faceplate surrounds & an arched faceplate surround; Custom sized faceplate surrounds; Black Porcelain Reflective & Red Soldier Course Brick interior linings.\*\*

\*\*You must select an interior lining to operate the unit. Check with your dealer for colors and availability.